

### TECHNICAL DATA

- Size: DN50-DN300
- Maximum working pressure: 10 bar  
(16 bar on request)
- Maximum working temperature: +40°C
- Maximum permissible error:  
In the lower zone:  $Q_{min} \dots Q_t: \pm 5\%$   
In the upper zone:  $Q_t \dots Q_s: \pm 2\%$
- Body material: Cast iron

### APPLICATION

Distribution water system, cold water.

### SPECIFICATION


- Type: Multi jet dry type water meter class B.
- Magnetic drive reliable characteristic.
- Removable may be rotated through 360°.
- ISO 4064 Class B Standard.
- Flanges drilled according to EN 1092-2.

Size	DN	50	65	80	100	125	150	200	250	300	
	G	2"	2"1/2	3"	4"	5"	6"	8"	10"	12"	
Nominal flow rate	m <sup>3</sup> /h	25	40	63	100	160	250	400	630	1000	
Minimum reading	m <sup>3</sup>	0.01					0.1				
Maximum reading	m <sup>3</sup>	999,999					9,999,999				

### DIMENSIONS

DN (mm)	Inch	L	H
50	2"	200	250
65	2"1/2	200	250
80	3"	225	255
100	4"	250	265
125	5"	250	290
150	6"	300	310
200	8"	350	350
250	10"	400	430
300	12"	450	460

### ACCURACY CURVE

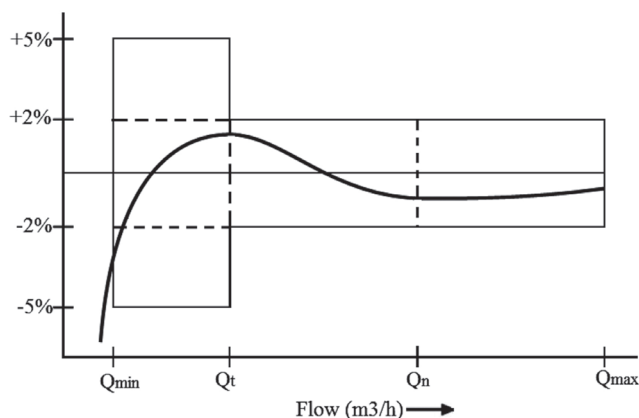

Subject to change without prior notice.