

TECHNICAL DATA

- Size: DN50-DN300
- Maximum working pressure: 10 bar
(16 bar on request)
- Maximum working temperature: +90°C
- Maximum permissible error:
In the lower zone: $Q_{min} \dots Q_t: \pm 5\%$
In the upper zone: $Q_t \dots Q_s: \pm 2\%$
- Body material: Cast iron

APPLICATION

Distribution water system, hot water.

SPECIFICATION


- Type: Multi jet dry type water meter class B.
- Magnetic drive reliable characteristic.
- Removable may be rotated through 360°.
- ISO 4064 Class B Standard.
- Flanges drilled according to EN 1092-2.

Size	DN	50	65	80	100	125	150	200	250	300	
	G	2"	2"1/2	3"	4"	5"	6"	8"	10"	12"	
Nominal flow rate	m ³ /h	25	40	63	100	160	250	400	630	1000	
Minimum reading	m ³	0.01					0.1				
Maximum reading	m ³	999,999					9,999,999				

DIMENSIONS

DN (mm)	Inch	L	H
50	2"	200	250
65	2"1/2	200	250
80	3"	225	255
100	4"	250	265
125	5"	250	290
150	6"	300	310
200	8"	350	350
250	10"	400	430
300	12"	450	460

ACCURACY CURVE

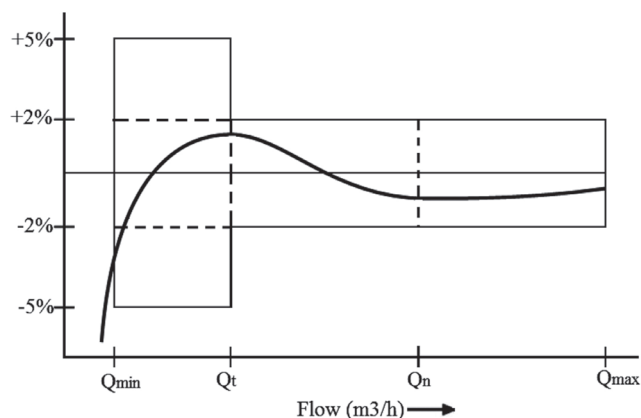

Subject to change without prior notice.